SPEC SHEET - I2CB40BH

(nstanta)



Instanta G2 InstaTap

Commercial Boiling 40 litre Matt Black High

BOILING



1 font included:



Also available in:



Product code: I2CB40H

Actual product may vary slightly depending on functionality. The image shown is a representation only.

Features and benefits

Enhanced hygiene

Antimicrobial steritouch keypad that kills 99.9% of surface bacteria, perfect for maintaining hygiene.

Smooth water flow

Dispenses a smooth water flow to minimise spluttering and steam.

Choice of dispense

There are three options available: free pour and 2 measured dispense.

Choice of design

Available in 2 heights and 2 finishes.

| Model | Capacity | Heat up time (minutes) | Rapid draw off (litres) | Rapid draw off (cups)* | Boiling cups per hour* | Nominal power rating kW @ 230V | Command centre dimensions W x D x H |
|----------|-----------|---------------------------|----------------------------|---------------------------|---------------------------|-----------------------------------|-------------------------------------------|
| I2CB40BH | 40 Litres | 88 | 40 | 240 | 180 | 3 | 560mm x 510mm x 600mm |

*Cups measured at 167ml

Product detail

Specification type

| Product code | I2CB40BH | |
|--------------|------------------------------------------------------|--|
| Product name | InstaTap G2 Commercial Boiling 40ltr matt black high | |

Capacity, weights & dimensions

| Water functions | Boiling |
|-------------------------------|-----------------------------------------------------------|
| Boiling capacity | 180 Cups per hour (default temperature setting at 96 ° C) |
| Unit dimension (W x D x H) | 560mm x 510mm x 600mm |
| Product weight - empty / full | 24kg / 68kg |

Plumbing

| Wholesome water inlet supply required | Cold Feed |
|---------------------------------------|------------------------------------------------------|
| Supply pressure range | 2 - 5 bar |
| Supply connection | 1 x isolated 3/4"BSP BSP fitting (Install rail 15mm) |
| Installation | Must comply with current water supply regulations |

Electrical


| Command centre power rating | 3kW @ 220-240V |
|-----------------------------|-------------------------------------------|
| Voltage supply | 13 amps |
| Power supply requirements | 1 x 13amp socket outlet |
| Cable length | 1.7m fitted with UK standard 3-pin plug |
| Installation | Must comply with current IEEE regulations |

Font

| High | |
|-----------------------|----------------------------------------------|
| Matt Black | |
| 150mm x 197mm x 364mm | |
| 280mm | |
| No | |
| | |
| | |
| | Matt Black 150mm x 197mm x 364mm 280mm |

Command Centre

| Factory temperature boiling | 96°C | |
|---------------------------------------|-----------------|--|
| Heat up time | 88 mins | |
| Stand by power loss (Idle over 24hrs) | 1.5 kW/h | |
| Wholesome water supply requirements | Cold Feed | |
| Tank material | Stainless steel | |
| Packed Dimensions (W x D x H) | | |
| Packed weight | | |

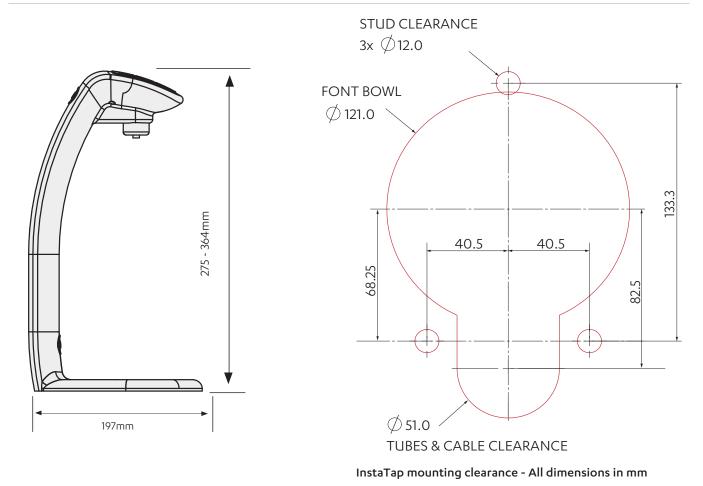

Under-counter unit installation

Clearance space required for under counter unit